LiuGong

CLG2070H

CLG


POWER TYPE	BASE CAPACITY	LOAD CENTER	SERVICE WEIGHT
Diesel	@RATED LOAD CENTER 15,400 LBS/7,000 KG	24 IN/600 MM	20,460 LBS/9,300 KG




XTRACARE
WARRANTY

CLG2070H SPECIFICATIONS >>>

GENERAL	Model				CLG2070H		
	Power Type	1			Diesel		
	Units	2			Imperial		Metric
	Base Capacity	3	@Rated load center	lbs	15,400	kg	7,000
	Load Center	4		in	24	mm	600
WEIGHTS	Service Weight	5	Unloaded	lbs	20,460	kg	9,300
	Axle Load	6	Loaded/Unloaded,Front	lbs	31,812/4048	kg	14,460/1,840
		7	Loaded/Unloaded,Rear	lbs	8360/12100	kg	3,800/5,500
TIRES	Tire Type	8			Pneumatic		
	Wheels	9	Front/Rear		4/2		
	Wheelbase	10		in	88.6	mm	2,250
	Tire Size	11	Front		8.25x15		
		12	Rear		8.25x15		
	Tread Width	13	Front/Rear	in	58/68.1	mm	1474/1730
MAST	Max.Fork Height	14	With std 2-stage mast	in	118.1	mm	3,000
	Free lift	15	With std 2-stage mast	in	8.3	mm	210
	Height,Upright Lowered	16	With std 2-stage mast	in	99.8	mm	2,534
	Height,Upright Extended	17	With std 2-stage mast	in	172.3	mm	4,377
	Mast Tilt,Fwd/Back	18	With std 2-stage mast	deg	6°/12°		
	Carriage	19	Width	in	72.4	mm	1,840
	Fork Spread	20	Minimum/Maximum	in	11.8/72.4	mm	300/1,840
	Fork Dimensions	21	TxWxL	in	2.6×5.9×59.8	mm	65x150x1,520
CHASSIS	Length to Fork Face	22	With std 2-stage mast	in	143.7	mm	3,650
	Overall Width	23		in	80.3	mm	2,040
	Overhead Guard Height	24		in	97.4	mm	2,475
	Turning Radius	25	Minimum outside	in	140.2	mm	3560
	Fork Overhang	26	With std 2-stage mast	in	23.3	mm	592
	Right Angle Stack	27	Includes load length and clearance	in	148.0	mm	3760
	Ground Clearance	28	Loaded below mast	in	8.0	mm	203
		29	Center of wheelbase	in	9.8	mm	250
PERFORMANCE	Travel Speed	30	Loaded/Unloaded	mph	16.1/17.4	km/h	26/28
	Lift Speed	31	Loaded/Unloaded	fpm	79/100	mm/s	390/500
	Lower Speed	32	Loaded/Unloaded	fpm	100/80	mm/s	500/400
	Max.Drawbar Pull	33	Loaded	lbs	13,200	N	6120
	Max.Gradeability	34	Loaded/Unloaded	%	20/20		
SYSTEMS	Brakes	35	Service		Foot/Hyd		
		36	Parking		Button/Hyd		
	Engine	37	Manufacturer		Cummins		
		38	Model		F3.8		
		39	Emission compliance		T4F/STAGE V		
		40	Cylinders		4		
		41	Displacement	Liters	3.8		
		42	Rated power	Hp/rpm	120/2,200	kW/rpm	90/2,200
		43	Max.torque	N·m/rpm	500/1,500		

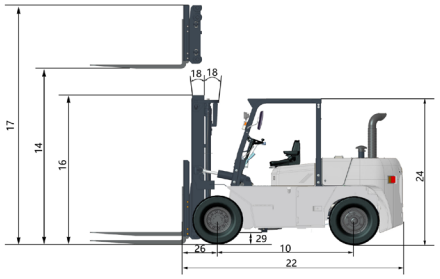

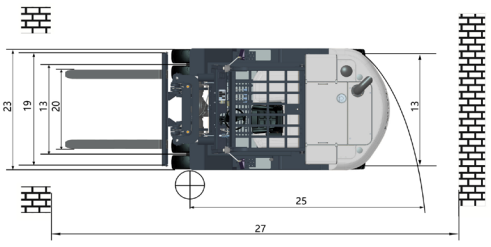

Specifications and designs are subject to change without notice.
Machines shown may include optional equipment.

LiuGong Construction Machinery N.A.LLC. T:281-579-8882 F:281-579-8388
22220 Merchants Way-Suite 100 www.liugongna.com
Katy,TX 77449
USA