LiuGong

A66JE


AWP


WORKING HEIGHT MAX.	OPERATING AMPLITUDE MAX.	UP AND OVER CLEARANCE MAX.	OVERALL LIFT CAPACITY MAX.	OVERALL WIDTH AND LENGTH
22.2 M (72'10")	13.2 M (43'3")	8.3 M (27'3")	260 KG (573 LB)	2.42 X 8.87 M (7'11" X 29'1")



XTRACARE
WARRANTY

A66JE SPECIFICATIONS >>>

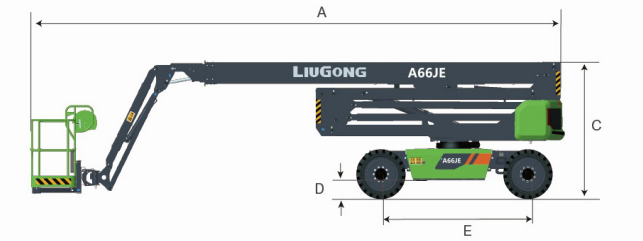

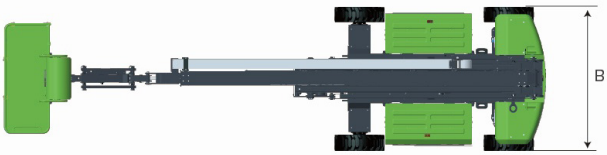

DIMENSIONS

Working Height Max.	22.2 m (72'10")
Platform Height Max.	20.2 m (66'3")
Operating Amplitude Max.	13.2 m (43'3")
Horizontal Reach Max.	12.6 m (41'4")
Up And Over Clearance Max.	8.3 m (27'3")
Platform Size (LxWxH)	1.83 x 0.76 x 1.1 m (6' x 2'6" x 3'7")
A. Length (Stowed/Transport)	8.87 m (29'1")
B. Width (Stowed/Transport)	2.42 / 2.29 m (7'11" / 7'6")
C. Height (Stowed/Transport)	2.32 / 2.2 m (7'7" / 7'3")
D. Ground Clearance	0.31 m (1')
E. Wheelbase	2.5 m (8'2")

PRODUCTIVITY

Overall Lift Capacity Max.	260 kg (573 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Jib Length	1.85 m (6')
Vertical Jib Rotation (Up/Down)	- 65° ~ + 70°
Turntable Rotation	360° Continuous
Turntable Tailswing (Boom lift/closed)	0 / 0.72 m (0' / 2'4")
Drive Speed (Stowed)	5 km/h (3.1 mph)
Drive Speed (Raised)	0.6 km/h (0.37 mph)
Gradeability	45 %
Tilt Sensor Activation	X 5° / Y 5°
Turning Radius (Inside/Outside)	2.4 / 5.5 m (7'10" / 18')
Tire Size (Solid Off-road)	33 x 12 -20
Drive Steering Type	4WD x 2WS


WEIGHT

Overall Weight	10,100 kg (22,266 lb)

POWER

Battery	48 V / 480 Ah (23.04 kWh)
Charger	48 V / 60 A
Lift Motor	AC 10 kW
Drive Motor	AC 3.3 kW
Auxiliary Power Unit	12 VDC
Hydraulic Tank Capacity	93 L (24 gal)

A66JE Working Range

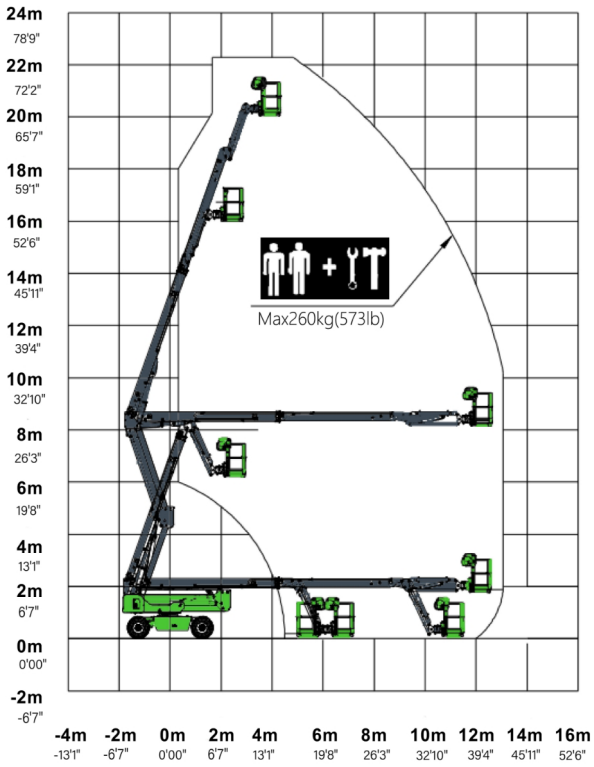

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

10/2024 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.