LiuGong

S4655E


AWP


WORKING HEIGHT MAX.	OVERALL LIFT CAPACITY MAX.	OVERALL WIDTH	OVERALL LENGTH	OVERALL WEIGHT
16 / 8 M (52'6" / 26'3")	350 KG (771 LB)	1.38 M (4'6")	3.1 M (10'2")	3,720 KG (8,201 LB)




XTRACARE
WARRANTY

S4655E SPECIFICATIONS >>>

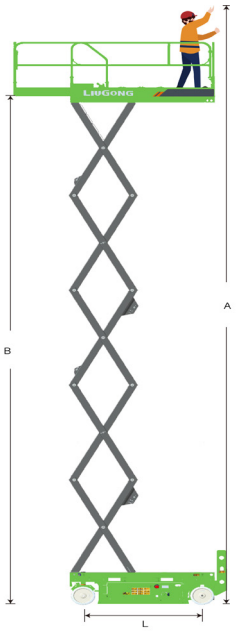



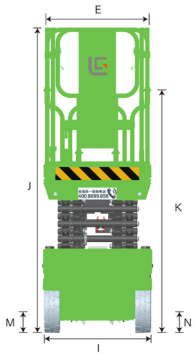

DIMENSIONS

A. Working Height Max.	16 / 8 m (52'6" / 26'3")
B. Platform Height Max.	14 / 6 m (45'11" / 19'8")
C. Platform Height (Stowed)	1.66 m (5'5")
D. Platform Length	2.88 m (9'5")
E. Platform Width	1.35 m (4'5")
F. Extension Deck (Roll Out)	1.22 m (4')
G. Overall Length	3.1 m (10'2")
H. Overall Length (Without Ladder)	2.9 m (9'6")
I. Overall Width	1.38 m (4'6")
J. Stowed Height (Rails Up)	2.74 m (8'11")
K. Stowed Height (Rails Down)	1.97 m (6'6")
L. Wheelbase	2.5 m (8'2")
M. Ground Clearance (Pothole Raised)	0.15 m (6")
N. Ground Clearance (Pothole Deployed)	0.02 m (0.8")

PRODUCTIVITY

Overall Lift Capacity Max.	350 kg (771 lb)
Extension Deck Capacity	136 kg (299 lb)
Platform Occupancy Max. (Indoor/Outdoor)	3 / 2
Drive Speed (Stowed)	2.5 km/h (1.55 mph)
Drive Speed (Raised)	0.4 km/h (0.25 mph)
Turning Radius (Inside/Outside)	0.3 / 3.12 m (11" / 10'3")
Lift/Lower Time	90 / 60 s
Gradeability	25 %
Tilt Sensor Activationx	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	381 × 127 mm (1'3" x 5")

POWER

Battery	24 V / 270 Ah (6.48 kWh)
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.7 kW

WEIGHT

Overall Weight	3,720 kg (8,201 lb)

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

10/2024 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.