LiuGong

CLG2160H

CLG


POWER TYPE	BASE CAPACITY	LOAD CENTER	SERVICE WEIGHT
Diesel	@RATED LOAD CENTER 35,000 LBS/16,000 KG	24 IN/600 MM	44,704 LBS/20,320 KG




XTRACARE
WARRANTY

CLG2160H SPECIFICATIONS >>>

General	Model				CLG2160H		
	Power Type	1			Diesel		
	Units	2			Imperial		Metric
	Base Capacity	3	@Rated load center	lbs	35,000	kg	16,000
	Load Center	4		in	24	mm	600
Weights	Service Weight	5	Unloaded	lbs	44,704	kg	20,320
	Axle Load	6	Loaded/Unloaded,Front	lbs	72,028/8,041	kg	32,740/3,655
		7	Loaded/Unloaded,Rear	lbs	21,879/22,825	kg	9,945/10,375
Tires	Tire Type	8			Pneumatic		
	Wheels	9	Front/Rear		4/2		
	Wheelbase	10		in	137.8	mm	3,500
	Tire Size	11	Front		12.00-20-18PR		
		12	Rear		12.00-20-18PR		
	Tread Width	13	Front/Rear	in	72.6/83.5	mm	1,844/2,120
Mast	Max.Fork Height	14	With std 2-stage mast	in	157.5	mm	4,000
	Free lift	15	With std 2-stage mast	in	3.5	mm	90
	Height,Upright Lowered	16	With std 2-stage mast	in	152.4	mm	3,870
	Height,Upright Extended	17	With std 2-stage mast	in	231.1	mm	5,870
	Mast Tilt,Fwd/Back	18	With std 2-stage mast	deg	6°/12°		
	Carriage	19	Width	in	96.5	mm	2,450
	Fork Spread	20	Minimum/Maximum	in	18.5/92.5	mm	470/2,350
	Fork Dimensions	21	TxWxL	in	3.5x7.9x59.8	mm	90x200x1,520
Chassis	Length to Fork Face	22	With std 2-stage mast	in	206.7	mm	5,250
	Overall Width	23		in	100.4	mm	2,550
	Overhead Guard Height	24		in	116.5	mm	2,960
	Turning Radius	25	Minimum outside	in	187.8	mm	4,770
	Fork Overhang	26	With std 2-stage mast	in	34.4	mm	875
	Right Angle Stack	27	Includes load length and clearance	in	290	mm	7,365
	Ground Clearance	28	Loaded below mast	in	11.6	mm	295
		29	Center of wheelbase	in	13.8	mm	350
Performance	Travel Speed	30	Loaded/Unloaded	mph	14.9/15.5	km/h	24/25
	Lift Speed	31	Loaded/Unloaded	fpm	74/80	mm/s	370/400
	Lower Speed	32	Loaded/Unloaded	fpm	102/84	mm/s	510/420
	Max.Drawbar Pull	33	Loaded	lbs	13,260	N	130,000
	Max.Gradeability	34	Loaded/Unloaded	%	28/28		
Systems	Brakes	35	Service		Foot/Hyd		
		36	Parking		Button/Hyd		
	Engine	37	Manufacturer		Cummins		
		38	Model		B6.7		
		39	Emission compliance		T4F/STAGEV		
		40	Cylinders		6		
		41	Displacement	Liters	6.7		
		42	Rated power	Hp/rpm	175/2,200	kW/rpm	129/2,200
		43	Max.torque	N·m/rpm	881/1,300		

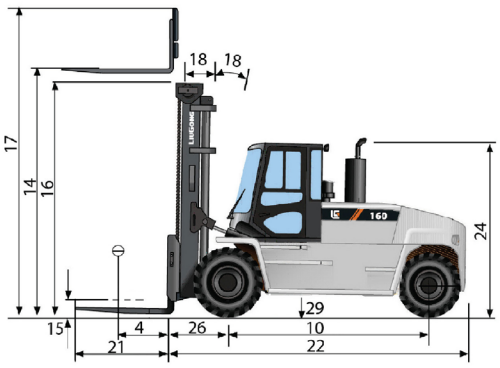

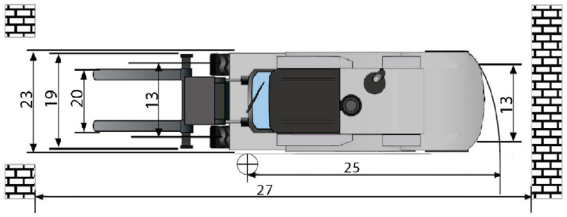

Specifications and designs are subject to change without notice.
Machines shown may"clude optional equipment.

LiuGong Construction Machinery N.A.LLC. T:281-579-8882 F:281-579-8388
22220 Merchants Way-Suite 100 www.liugongna.com
Katy,TX 77449
USA