LiuGong

T72JE

AWP

WORKING HEIGHT MAX.	PLATFORM HEIGHT MAX.	OPERATING AMPLITUDE MAX.	BATTERY	OVERALL LIFT CAPACITY MAX.
23.8 M (78'1")	21.8 M (71'6")	16.3 M (53'6")	48 V / 480 Ah (23.04 kWh)	300/454 KG(661/1,000 LB)



XTRACARE WARRANTY

T72JE SPECIFICATIONS >>>

DIMENSIONS

Working Height Max.	23.8 m (78'1")
Platform Height Max.	21.8 m (71'6")
Operating Amplitude Max.	16.3 m (53'6")
Horizontal Reach Max.	15.7 m (51'6")
Platform Size (LxWxH)	2.4 x 0.9 x 1.1 m (7'10" x 2'11" x 3'7")
A. Length (Stowed/Transport)	9.5 m (31'2")
B. Width (Stowed/Transport)	2.42 / 2.28 m (7'11" / 7'6")
C. Height (Stowed/Transport)	2.47 / 2.27 m (8'1" / 7'5")
D. Ground Clearance	0.276 m (10")
E. Wheelbase	3 m (9'10")

PRODUCTIVITY

Overall Lift Capacity Max.	300 / 454 kg (661 / 1,000 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Vertical Jib Rotation (Up/Down)	- 65° ~ + 70°
Turntable Rotation	360° Continuous
Turntable Tailswing (Boom Raised/Stowed)	1.65 / 2.25 m (5'5" / 7'5")
Drive Speed (Stowed)	5 km/h (3.10 mph)
Drive Speed (Raised)	1 km/h (0.62 mph)
Gradeability	40 %
Tilt Sensor Activation	X 5° / Y 5°
Turning Radius (Inside/Outside)	4.2 / 6.3 m (13'9" / 20'8")
Tire Size (Solid Off-road)	33 x 12 - 20
Drive Steering Type	4WD x 2WS


WEIGHT


Overall Weight	11,620 kg (25,617 lb)


POWER

Battery	48 V / 480 Ah (23.04 kWh)
Charger	48 V / 60 A
Lift Motor	AC 12 kW
Drive Motor	AC 3.3 kW
Auxiliary Power Unit	12VDC
Hydraulic Tank Capacity	100 L (26 gal 3 pt)

T72JE Working Range

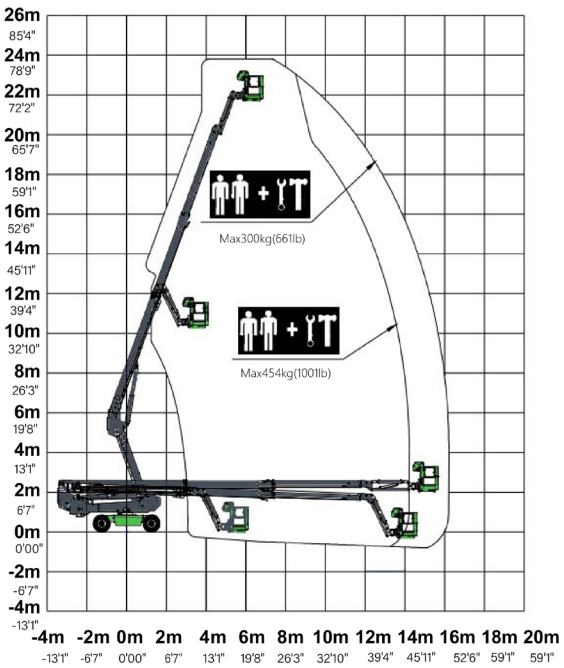

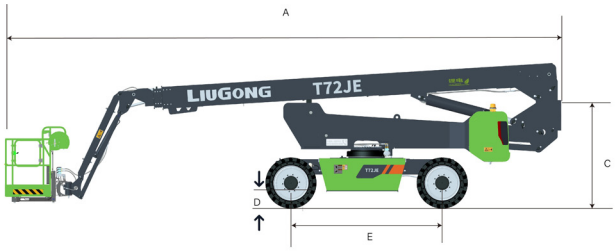

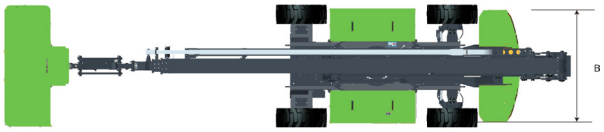

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

10/2024 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.