
LiuGong

CLG2020G


CLG


POWER TYPE	BASE CAPACITY @RATED LOAD CENTER	LOAD CENTER	SERVICE WEIGHT
Gas/LPG	4,000 LBS/2,000 KG	24 IN/500 MM	8,554 LBS/3,888 KG

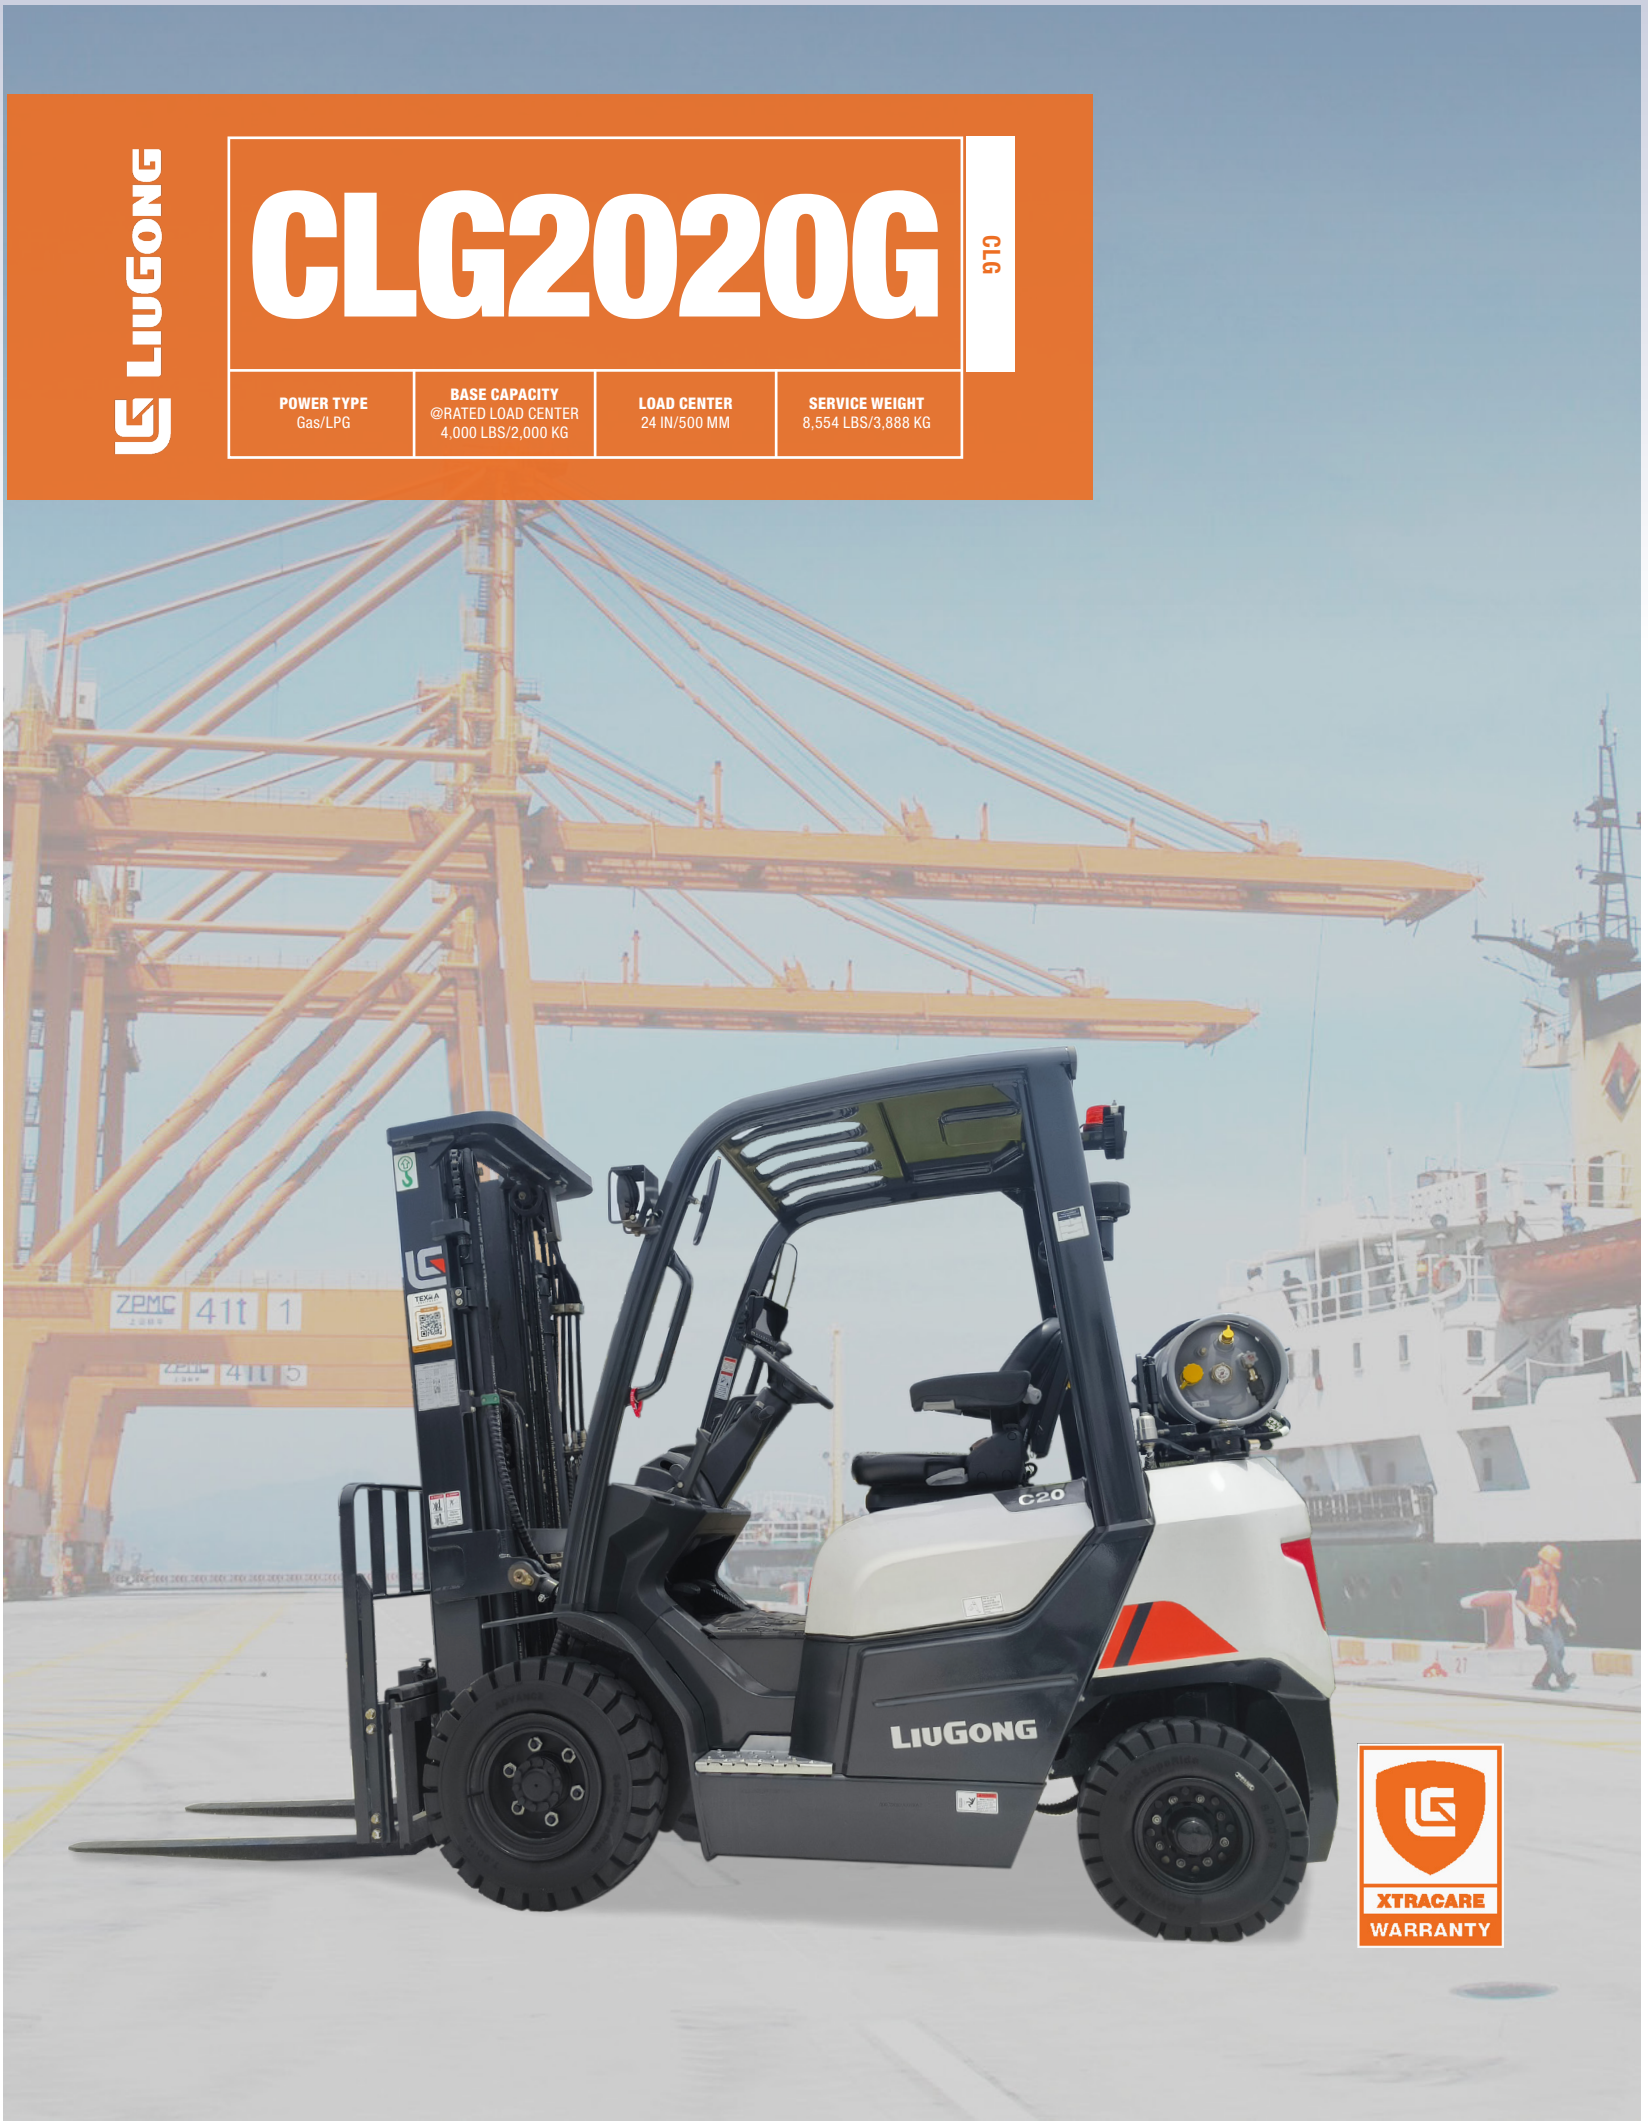

CLG2020G SPECIFICATIONS >>>

GENERAL	Model				CLG2020G		
	Power Type	1			Gas/LPG		
	Units	2			Imperial		Metric
	Base Capacity	3	@Rated load center	lbs	4000	kg	2000
	Load Center	4		in	24	mm	500
WEIGHTS	Service Weight	5	Unloaded	lbs	8554	kg	3888
	Axle Load	6	Loaded/Unloaded,Front	lbs	9695/2708	kg	4407/1231
		7	Loaded/Unloaded,Rear	lbs	3260/5845	kg	1482/2657
TIRES	Tire Type	8			Pneumatic		
	Wheels	9	Front/Rear		2/2		
	Wheelbase	10		in	65.0	mm	1650
	Tire Size	11	Front		7.0-12-12PR		
		12	Rear		6.00-9-10PR		
	Tread Width	13	Front/Rear	in	37.8/39	mm	960/992
MAST	Max.Fork Height	14	With std 2-stage mast	in	118.1	mm	3000
	Free lift	15	With std 2-stage mast	in	5.5	mm	140
	Height,Upright Lowered	16	With std 2-stage mast	in	86.3	mm	2193
	Height,Upright Extended	17	With std 2-stage mast	in	160.5	mm	4076
	Mast Tilt,Fwd/Back	18	With std 2-stage mast	deg	6°/12°		
	Carriage	19	Width	in	40.9	mm	1040
	Fork Spread	20	Minimum/Maximum	in	9/39.8	mm	230/1010
	Fork Dimensions	21	TxWxL	in	1.6/3.9/42.1	mm	40×100×1070
CHASSIS	Length to Fork Face	22	With std 2-stage mast	in	99.8	mm	2534
	Overall Width	23		in	45.3	mm	1150
	Overhead Guard Height	24		in	85.8	mm	2180
	Turning Radius	25	Minimum outside	in	89.8	mm	2280
	Fork Overhang	26	With std 2-stage mast	in	18.5	mm	470
	Right Angle Stack	27	Includes load length and clearance	in	158.0	mm	4012
	Ground Clearance	28	Loaded below mast	in	3.5	mm	88
		29	Center of wheelbase	in	5.7	mm	145
PERFORMANCE	Travel Speed	30	Loaded/Unloaded	mph	10/10.6	km/h	16/17
	Lift Speed	31	Loaded/Unloaded	fpm	134/140	mm/s	670/700
	Lower Speed	32	Loaded/Unloaded	fpm	102/94	mm/s	510/470
	Max.Drawbar Pull	33	Loaded	lbs	4180	kg	1900
	Max.Gradeability	34	Loaded/Unloaded	%	20/30		
SYSTEMS	Brakes	35	Service		Foot/Hyd		
		36	Parking		Hand/Mech		
	Engine	37	Manufacturer		Kubota		
		38	Model		WJ2503-L-E3		
		39	Emission compliance		EU Stage V/EPA		
		40	Cylinders		4		
		41	Displacement	Liters	2.491		
		42	Rated power	Hp/rpm	55.3/2,600	kW/rpm	41.3/2,600
		43	Max.torque	N·m/rpm	175/1,200(LPG)	167.6/1,800(GAS)	

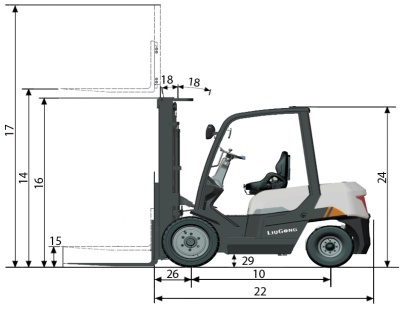

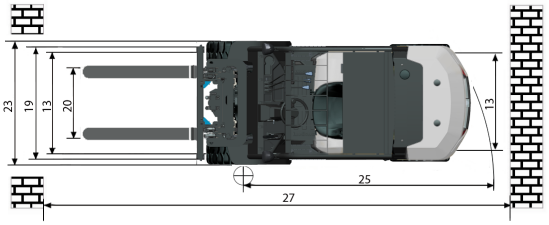

Specifications and designs are subject to change without notice.
Machines shown may include optional equipment.

LiuGong Construction Machinery N.A.LLC. T:281-579-8882 F:281-579-8388
22220 Merchants Way-Suite 100 www.liugongna.com
Katy,TX 77449
USA