LiuGong

CLG2030G-C

C2


POWER TYPE	BASE CAPACITY	LOAD CENTER	SERVICE WEIGHT
LPG	@RATED LOAD CENTER 6,000 LBS/2,750 KG	24 IN/600 MM	10,527 LBS/4,785 KG




XTRACARE WARRANTY

CLG2030G-C SPECIFICATIONS >>>

General	Model				CLG2030G-C		
	Power Type	1			LPG		
	Units	2			Imperial		Metric
	Base Capacity	3	@Rated load center	lbs	6000	kg	2750
	Load Center	4		in	24	mm	600
Weights	Service Weight	5	Unloaded	lbs	10527	kg	4785
	Axle Load	6	Loaded/Unloaded,Front	lbs	14421/2156	kg	6555/980
		7	Loaded/Unloaded,Rear	lbs	4015/6512	kg	1825/2960
Tires	Tire Type	8			Cushion		
	Wheels	9	Front/Rear		2/2		
	Wheelbase	10		in	58.5	mm	1485
	Tire Size	11	Front		21×8-15		
		12	Rear		16×5×10-1/2		
	Tread Width	13	Front/Rear	in	35.8/36.2	mm	910/920
Mast	Max.Fork Height	14	Std 3-stage mast	in	185	mm	4700
	Free lift	15	Std 3-stage mast	in	40.7	mm	1033
	Height,Upright Lowered	16	Std 3-stage mast	in	85.8	mm	2180
	Height,Upright Extended	17	Std 3-stage mast	in	231.7	mm	5886
	Mast Tilt,Fwd/Back	18	Std 3-stage mast	°	6 / 6		
	Carriage	19	Width	in	43.3	mm	1100
	Fork Spread	20	Minimum/Maximum	in	9.6/43.3	mm	244/1100
	Fork Dimensions	21	TxWxL	in	1.8 x 4.8 x 42.1	mm	45 x 122 x 1070
Chassis	Length to Fork Face	22	Std 3-stage mast	in	98.6	mm	2505
	Overall Width	23		in	43.9	mm	1115
	Overhead Guard Height	24		in	83.5	mm	2120
	Turning Radius	25	Minimum outside	in	81.9	mm	2080
	Fork Overhang	26	Std 3-stage mast	in	18.5	mm	469
	Right Angle Stack	27	Includes load length and clearance	in	147.6	mm	3750
	Ground Clearance	28	Loaded below mast	in	3.5	mm	90
		29	Center of wheelbase	in	3.9	mm	100
Performance	Travel Speed	30	Loaded/Unloaded	mph	10.6/10.6	km/h	17/17
	Lift Speed	31	Loaded/Unloaded	fpm	101/105	mm/s	505/525
	Lower Speed	32	Loaded/Unloaded	fpm	86/76	mm/s	430/380
	Max.Drawbar Pull	33	Loaded	lbs	5280	kg	2400
	Max.Gradeability	34	Loaded/Unloaded	%	24/25		
Systems	Brakes	35	Service		Foot/Hyd		
		36	Parking		Hand/Mech		
	Engine	37	Manufacturer		Kubota		
		38	Model		WJ2503-L-E3		
		39	Emission compliance		EU Stage V/EPA		
		40	Cylinders		4		
		41	Displacement	L	2.491		
		42	Rated power	Hp/rpm	55.3/2,600	kW/rpm	41.3/2,600
		43	Max.torque	N·m/rpm	175/1,200		

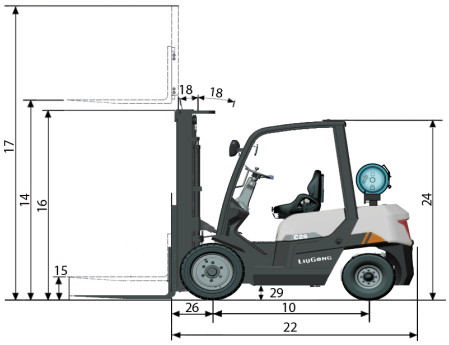

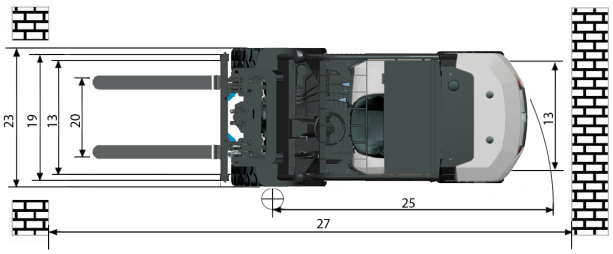

Specifications and designs are subject to change without notice.
Machines shown may"clude optional equipment.

LiuGong Construction Machinery N.A.LLC. T:281-579-8882 F:281-579-8388
22220 Merchants Way-Suite 100 www.liugongna.com
Katy,TX 77449
USA