LiuGong

A52JE


AWP


WORKING HEIGHT MAX.	OPERATING AMPLITUDE MAX.	UP AND OVER CLEARANCE MAX.	OVERALL LIFT CAPACITY MAX.	OVERALL WIDTH AND LENGTH
17.8 M (58'5")	9.78 M (32'1")	8.16 M (26'9")	260 KG (573 LB)	2.3 X 7.2M (7'7" X 23'7")



XTRACARE
WARRANTY

A52JE SPECIFICATIONS >>>

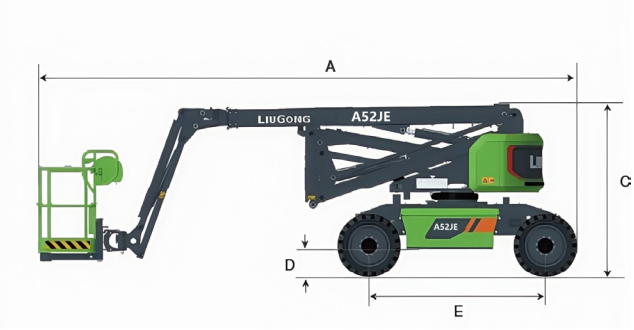

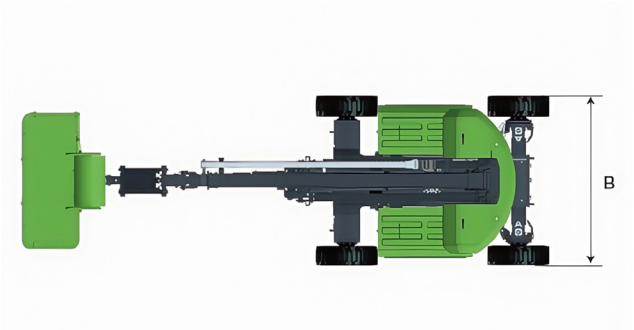

DIMENSIONS

Working Height Max.	17.8 m (58'5")
Platform Height Max.	15.8 m (51'10")
Operating Amplitude Max.	9.78 m (32'1")
Horizontal Reach Max.	9.18 m (30'1")
Up And Over Clearance Max.	8.16 m (26'9")
Platform Size (LxWxH)	1.83 x 0.76 x 1.1 m (6' x 2'6" x 3'7")
A. Length (Stowed/Transport)	7.2 m (23'7")
B. Width (Stowed/Transport)	2.3 m (7'7")
C. Height (Stowed/Transport)	2.35 m (7'9")
D. Ground Clearance	0.37 m (1'3")
E. Wheelbase	2.36 m (7'9")

PRODUCTIVITY

Overall Lift Capacity Max.	260 kg (573 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Vertical Jib Rotation (Up/Down)	- 70° ~ + 72°
Turntable Rotation	360° Discontinuous
Turntable Tailswing (Boom lift/stowed)	0 / 0 m (0' / 0')
Drive Speed (Stowed)	5 km/h (3.1 mph)
Drive Speed (Raised)	0.6 km/h (0.37 mph)
Gradeability (Stowed)	40 %
Tilt Sensor Activation	X 5° / Y 5°
Turning Radius (Inside/Outside)	2.06 / 4.78 m (6'9" / 15'8")
Tire Size (Solid Off-road)	33 x 12 - 20
Drive Steering Type	4WD x 2WS


WEIGHT

Overall Weight	7,900 kg (17,416 lb)

POWER

Battery	48 V / 350 Ah (16.8 kWh)
Charger	48 V / 60 A
Lift Motor	AC 10 kW
Drive Motor	AC 3.3 kW
Auxiliary Power Unit	12 VDC
Hydraulic Tank Capacity	65 L (17 gal)

A52JE Working Range

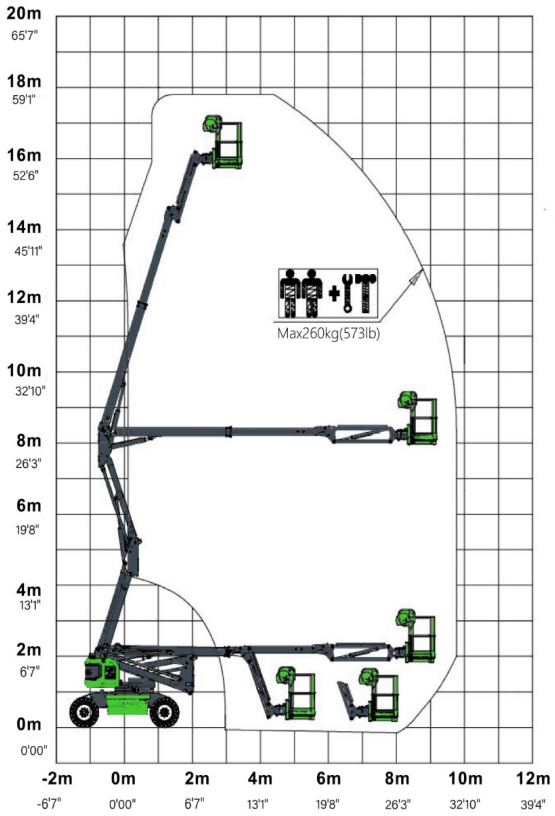

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

10/2024 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.